GENERAL GOLD

AIR CONDITIONERS

general-gold.com

GENERAL GOLD
ECO & T3
CONTROL
AMPERE
LEVELS

خنک نگه داشتن شما، حتی در نزدیکی آتشفشان

تحمل دما تا 65 درجه سانتی گراد

ECO & T3
SCROLL
COMPRESSOR

AMP - INVERTER

GENERAL GOLD

T3 | R410A | GMCC

Ampere Control · Inverter · T3 · Healthy Filter · Refrigerant · Golden Fin · Turbo Mode · Rapid Cooling · Quiet · 4-Way auto Swing

Model name	GG-TS12000 TITANUM	GG-TS18000 TITANUM	GG-TS24000 TITANUM
Power supply(V-Ph-Hz)	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph
Amper Levels(L1,L2,L3)	2A , 3A , 4A	3A , 4A , 6A	4A , 6A , 8A
Cooling			
Capacity(Btu/h)	12000	18000	24000
Rated current(A)	/	/	/
EER(W/W)	2.4	2.4	2.4
Heating			
Capacity(Btu/h)	12500	18500	24500
Rated current(A)	/	/	/
COP(W/W)	3.60	3.60	3.60
Compressor & Features			
Type	ROTARY	ROTARY	ROTARY
Brand	GMCC	GMCC	SANYO
Indoor air flow(m3/h)	680	810	1350
Indoor sound level(dB(A))	28	31	36
Refrigerant type	R410A	R410A	R410A
Loading Qty(40HQ)	255	177	120
Indoor unit			
Dimensions(W*D*H)	820*306*195	920*306*195	1100*333*222
Net weight(KG)	9.5	10.5	15
Outdoor unit			
Dimensions(W*D*H)	795*305*549	853*349*602	967×421×803
Net weight(KG)	24.5	30	59
Number of rows radiator	1	2	2

AMP - INVERTER

GENERAL GOLD

T3 | R410A | GREE

Ampere Control | Inverter | T3 | WiFi | Refrigerant | Golden Fin | Turbo Mode | Rapid Cooling | Quiet | 4-Way auto Swing

Model name	GG-GS30000 PORSCHE
Power supply(V-Ph-Hz)	220-240V, 50Hz, 1Ph
Amper Levels(L1,L2,L3)	L1 (4A) - L2 (9A) - L3(12A)
Cooling	
Capacity(Btu/h)	30000
Rated current(A)	/
EER(W/W)	3.22
Heating	
Capacity(Btu/h)	30700
Rated current(A)	12.5
COP(W/W)	3.22
Compressor & Features	
Type	ROTARY
Brand	GREE
Indoor air flow(m3/h)	1350
Indoor sound level(dB(A))	52
Refrigerant type	R410A
Loading Qty(40HQ)	108
Indoor unit	
Dimensions(W*D*H)	1078*333*246
Net weight(KG)	15
Outdoor unit	
Dimensions(W*D*H)	1000*746*427
Net weight(KG)	52.5
Number of rows radiator	2

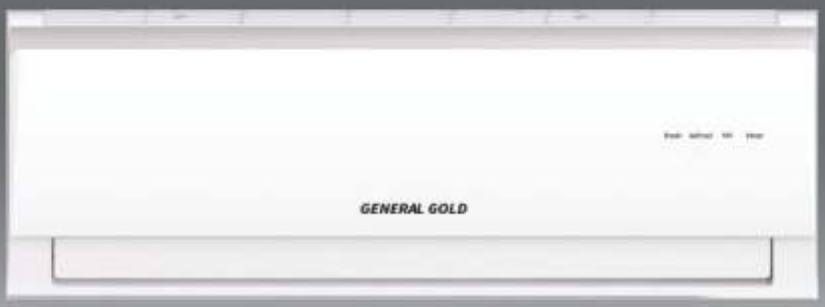

R410A | GMCC

R410A Refrigerant
High Efficiency
Timer Mode
Healthy Filter
Operation in low temperature
Golden Fin
Turbo Mode
Rapid Cooling
Quiet
4-Way auto Swing

Model name	GG-MS12000 PLATINUM	GG-MS18000 PLATINUM	GG-MS24000 PLATINUM
Power supply(V-Ph-Hz)	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph
Cooling			
Capacity(Btu/h)	12000	18000	24000
Rated current(A)	5.2	7.71	10
EER(W/W)	2.81	2.81	3.01
Heating			
Capacity(Btu/h)	12500	18000	27000
Rated current(A)	5.0	7	10
COP(W/W)	3.21	3.01	3.41
Compressor & Features			
Type	ROTARY	ROTARY	ROTARY
Brand	GMCC	GMCC	GMCC
Indoor air flow(m3/h)	575	810	1000
Indoor sound level(dB(A))	28	34	33
Refrigerant type	R410A	R410A	R410A
Loading Qty(40HQ)	265	192	147
Indoor unit			
Dimensions(W*D*H)	805*194*285	957*213*302	1040*220*327
Net weight(KG)	8.2	11.4	13.2
Outdoor unit			
Dimensions(W*D*H)	720*270*495	805*330*554	890*34 2*673
Net weight(KG)	26.5	37.6	53
Number of rows radiator	1	1.6	1.6

Rotary

GENERAL GOLD

R410A | GMCC

R410A Refrigerant

High Efficiency

Timer Mode

Healthy Filter

Operation in low temperature

Golden Fin

Turbo Mode

Rapid Cooling

Quiet

4-Way auto Swing

Model name	GG-MS30 VITALLY
Power supply(V-Ph-Hz)	220-240V, 50Hz, 1Ph
Cooling	
Capacity(Btu/h)	30000
Rated current(A)	11.7
EER(W/W)	3.3
Heating	
Capacity(Btu/h)	30500
Rated current(A)	10.9
COP(W/W)	3.66
Compressor & Features	
Type	ROTARY
Brand	GMCC
Indoor air flow(m3/h)	1460
Indoor sound level(dB(A))	40
Refrigerant type	R410A
Loading Qty(40HQ)	96
Indoor unit	
Dimensions(W*D*H)	1260*283*362
Net weight(KG)	21.8
Outdoor unit	
Dimensions(W*D*H)	946*410*810
Net weight(KG)	63.9
Number of rows radiator	2

AMP - INVERTER GENERAL GOLD

T3 | R410A | HIGHLY

Ampere Control

Inverter

T3

Healthy Filter

Auto Restart

Golden Fin

Turbo Mode

Rapid Cooling

Quiet

4-Way auto Swing

Model name	GG-TF60000D TITANUM
Power supply(V-Ph-Hz)	220-240V, 50Hz, 1Ph
Amper Levels(L1,L2,L3)	L1 (8 A) - L2 (12 A) - L3(15 A)
Cooling	
Capacity(Btu/h)	60000
Rated current(A)	/
EER(W/W)	2
Heating	
Capacity(Btu/h)	62000
Rated current(A)	26.7
COP(W/W)	3.60
Compressor & Features	
Type	ROTARY
Brand	HIGHLY
Indoor air flow(m3/h)	2100
Indoor sound level(dB(A))	49
Refrigerant type	R410A
Loading Qty(40HQ)	45
Indoor unit	
Dimensions(W*D*H)	1918 x600x390
Net weight(KG)	/
Outdoor unit	
Dimensions(W*D*H)	1000×400×1250
Net weight(KG)	/
Number of rows radiator	3

Rotary

GENERAL GOLD

T3 | R410A | GMCC

R410A — Refrigerant

High Efficiency

65°C — T3

Healthy Filter

Auto Restart

Golden Fin

Turbo Mode

Rapid Cooling

Quiet

4-Way auto Swing

Model name	GG-TF36000H ULTRA
Power supply(V-Ph-Hz)	220-240V, 50Hz, 1Ph
Cooling	
Capacity(Btu/h)	36000
Rated current(A)	17.3
EER(W/W)	2.4
Heating	
Capacity(Btu/h)	36500
Rated current(A)	14.1
COP(W/W)	12.3
Compressor & Features	
Type	Rotary
Brand	GMCC
Indoor air flow(m3/h)	1680
Indoor sound level(dB(A))	40
Refrigerant type	R410A
Loading Qty(40HQ)	62
Indoor unit	
Dimensions(W*D*H)	600*390*1918
Net weight(KG)	51
Outdoor unit	
Dimensions(W*D*H)	984*421*804
Net weight(KG)	69
Number of rows radiator	2

Rotary

GENERAL GOLD

T3 | R410A | HIGHLY

- R410A — Refrigerant
- High Efficiency
- 65°C — T3
- Healthy Filter
- Auto Restart
- Golden Fin
- Turbo Mode
- Rapid Cooling
- Quiet
- 4-Way auto Swing

Model name	GG-TF36000 ULTRA
Power supply(V-Ph-Hz)	220-240V, 50Hz, 1Ph
Cooling	
Capacity(Btu/h)	36000
Rated current(A)	17.7
EER(W/W)	2.4
Heating	
Capacity(Btu/h)	38000
Rated current(A)	14.6
COP(W/W)	12.3
Compressor & Features	
Type	Rotary
Brand	HIGHLY
Indoor air flow(m3/h)	1900
Indoor sound level(dB(A))	39
Refrigerant type	R410A
Loading Qty(40HQ)	54
Indoor unit	
Dimensions(W*D*H)	600*390*1918
Net weight(KG)	55
Outdoor unit	
Dimensions(W*D*H)	976*421*804
Net weight(KG)	59
Number of rows radiator	2

SCROLL GENERAL GOLD

T3 | R410A | Copeland

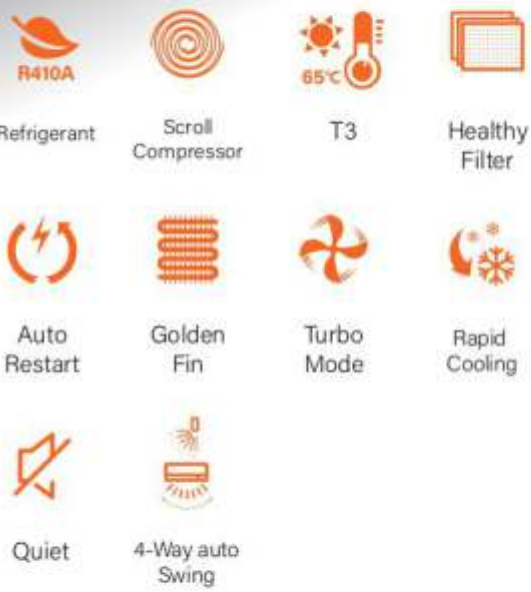

Model name	GG-MF36000DC SCROLL
Power supply(V-Ph-Hz)	220-240V, 50Hz, 1Ph
Cooling	36000
Capacity(Btu/h)	19.4
Rated current(A)	2.29
EER(W/W)	
Heating	
Capacity(Btu/h)	/
Rated current(A)	/
COP(W/W)	/
Compressor & Features	
Type	SCROLL
Brand	Copeland
Indoor air flow(m3/h)	1690
Indoor sound level(dB(A))	62
Refrigerant type	R410A
Loading Qty(40HQ)	42
Indoor unit	
Dimensions(W*D*H)	600*455*1934
Net weight(KG)	59.0
Outdoor unit	
Dimensions(W*D*H)	900*350*1170
Net weight(KG)	87.5
Number of rows radiator	2

SCROLL GENERAL GOLD

T3 | R410A | SANYO

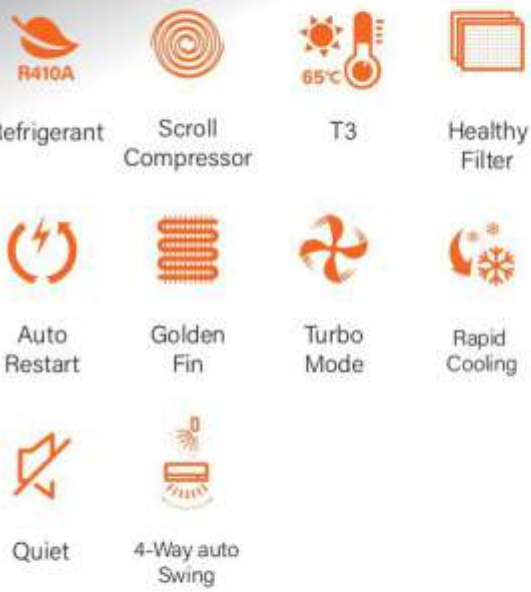

Refrigerant | Scroll Compressor | T3 | Healthy Filter

Auto Restart | Golden Fin | Turbo Mode | Rapid Cooling

Quiet | 4-Way auto Swing

Model name	GG-TF48000D SCROLL
Power supply(V-Ph-Hz)	380V , 50Hz , 3Ph
Cooling	
Capacity(Btu/h)	48000
Rated current(A)	20.2
EER(W/W)	3.30
Heating	49000
Capacity(Btu/h)	18.9
Rated current(A)	3.60
COP(W/W)	
Compressor & Features	
Type	SCROLL
Brand	SANYO
Indoor air flow(m3/h)	1950
Indoor sound level(dB(A))	41
Refrigerant type	R410A
Loading Qty(40HQ)	45
Indoor unit	
Dimensions(W*D*H)	1918*600*390
Net weight(KG)	55
Outdoor unit	
Dimensions(W*D*H)	1000×400×1250
Net weight(KG)	105
Number of rows radiator	2

SCROLL GENERAL GOLD

T3 | R410A | LG

- R410A — Refrigerant
- Scroll Compressor
- 65°C — T3
- Healthy Filter
- Auto Restart
- Golden Fin
- Turbo Mode
- Rapid Cooling
- Quiet
- 4-Way auto Swing

Model name	GG-MF60000D SCROLL
Power supply(V-Ph-Hz)	220-240V, 50Hz, 1Ph
Cooling	60000
Capacity(Btu/h)	10.1
Rated current(A)	3.30
EER(W/W)	
Heating	
Capacity(Btu/h)	60000
Rated current(A)	9.67
COP(W/W)	3.66
Compressor & Features	
Type	SCROLL
Brand	LG
Indoor air flow(m3/h)	2470
Indoor sound level(dB(A))	50
Refrigerant type	R410A
Loading Qty(40HQ)	40
Indoor unit	
Dimensions(W*D*H)	600x455x1934
Net weight(KG)	59.3
Outdoor unit	
Dimensions(W*D*H)	952x415x1333
Net weight(KG)	105.2
Number of rows radiator	2

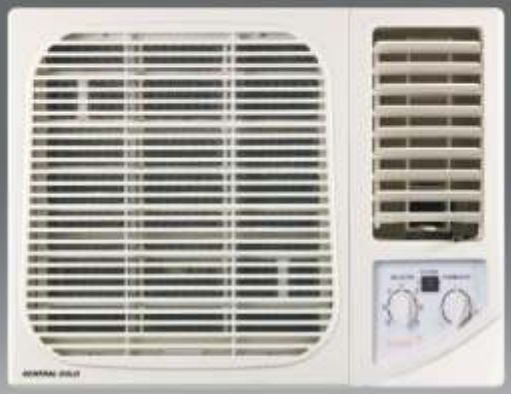

T3 | GMCC

High Efficiency | Refrigerant (R22) | T3 (65°C) | Healthy Filter | Auto Restart | Golden Fin | Turbo Mode | Rapid Cooling | Quiet | Easy Installation

Model name	GG-MW9000C ULTRA	GG-MW12000C ULTRA
Power supply(V-Ph-Hz)	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph
Cooling		
Capacity(Btu/h)	9000	12000
Rated current(A)	4.5	7.0
EER(W/W)	2.6	2.08
Heating		
Capacity(Btu/h)	/	/
Rated current(A)	/	/
COP(W/W)	/	/
Compressor & Features		
Type	Rotary	Rotary
Brand	GMCC	GMCC
Indoor air flow(m3/h)	360	450
Indoor sound level(dB(A))	47	46
Refrigerant type	R22	R22
Loading Qty(40HQ)	572	342
Indoor unit		
Dimensions(W*D*H)	450*535*346	600*560*380
Net weight(KG)	27	36
Outdoor unit		
Dimensions(W*D*H)	/	/
Net weight(KG)	/	/
Number of rows radiator	/	/

T3 | GMCC

High Efficiency | Refrigerant (R22) | T3 (65°C) | Healthy Filter | Auto Restart | Golden Fin | Turbo Mode | Rapid Cooling | Quiet | Easy Installation

Model name	GG-MW18000C ULTRA	GG-MW24000 ULTRA
Power supply(V-Ph-Hz)	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph
Cooling		
Capacity(Btu/h)	18000	24000
Rated current(A)	11.02	12.5
EER(W/W)	1.92	1.90
Heating		
Capacity(Btu/h)	/	24000
Rated current(A)	/	15.7
COP(W/W)	/	0.89
Compressor & Features		
Type	Rotary	Rotary
Brand	GMCC	GMCC
Indoor air flow(m3/h)	730	805
Indoor sound level(dB(A))	50	55
Refrigerant type	R22	R22
Loading Qty(40HQ)	255	255
Indoor unit		
Dimensions(W*D*H)	660*680*428	660*680*428
Net weight(KG)	52	56.5
Outdoor unit		
Dimensions(W*D*H)	/	/
Net weight(KG)	/	/
Number of rows radiator	/	/

GENERAL GOLD

AIR CONDITIONERS

- نصب و ارسال رایگان
- 5 سال گارانتی کپرسور، 24 ماه قطعات
- پرداخت درب منزل (سراسر ایران)
- تحویل فوری (سراسر ایران)

general-gold.com